



# H<sub>2</sub>HUBB TEST REPORT

📍 Overland Park KS  
✉ Info@H<sub>2</sub>HUBB.com  
🌐 www.H<sub>2</sub>HUBB.com

Date : 16 Jan 2026

## Evaluation Introduction

Our report summarizes our analysis of the H<sub>2</sub>-Max Hydrogen Water Bottle offered by the company ZYNAFLO. H<sub>2</sub>HUBB classifies this device as a premium high-pressure (psi) H<sub>2</sub> water portable system. The device features a PEM/SPE membrane to ensure H<sub>2</sub> gas production regardless of source water conductivity (TDS). Its session time-frame or cycle time-frames are 5 minutes and 10 minutes. We evaluated the system's dissolved hydrogen performance at 5 and 10 minutes. The unit contains a 3.7 V +2200 mAh battery, as stated by the battery specs. Our investigation was to analyze whether the product would meet our H<sub>2</sub> product performance standards, which must be achieved to be approved and recommended by H<sub>2</sub>HUBB.

To learn more about our H<sub>2</sub> performance standards for hydrogen water bottles, visit [H<sub>2</sub>HUBB](https://h2hubb.com).

## H<sub>2</sub> Products

- Company: ZYNAFLO
- Product Name: H<sub>2</sub>-Max Hydrogen Water Bottle
- Type: High-Concentration H<sub>2</sub> Water Device
  - PEM/SPE
  - Portable Hydrogen Water Generator
  - High-PSI bottle
- URL Link: <https://zynaflo.com>

## Method and Procedure

- Distilled water: 6.0 pH (verifies that unit can function with low water conductivity)
- ΔpH (delta pH): Did not increase
- Water Temperature: 65~70°F/ 18~21°C
- Bottle Vol Size: 0.208 L or 208 mL (7.03 oz)
- Cycle Time Frame:
  - 5-minutes
  - 10-minutes
- Contamination Tests:
  - Chlorine generation (Cl<sub>2</sub>)
  - Ozone Generation (O<sub>3</sub>)
- Test Location: 277 meters (909 ft elevation)
- Test Methodology:
  - Electrochemical detection using Unisense H<sub>2</sub> Microsensor.
- All Dissolved H<sub>2</sub> Concentration Tests Converted to SATP (water temp and pressure)
- Claimed Dissolved H<sub>2</sub> mg/L: > 5.0 mg/L as stated on website



## Test Results

To measure the dissolved hydrogen gas concentration, the H<sub>2</sub>-Max bottle was filled with 208 mL (7.03 oz) of distilled water—up to the base of the lid threads. The lid was then securely fastened, and the system was activated using either the 5-minute or 10-minute hydrogen generation mode. All measurements were conducted using the Unisense H<sub>2</sub> Microsensor paired with the UniAmp amplifier. Each test was performed in triplicate to ensure accuracy and reproducibility, and the resulting values were averaged to determine the bottle's overall performance. While the primary focus is on the mean dissolved hydrogen concentration, peak concentration values are also reported to provide a more comprehensive assessment of the bottle's hydrogen-generation capability.

### H<sub>2</sub> Concentration at SATP:

- 5-mins avg mg/L (ppm):  $\cong$  4.05 mg/L (ppm)
- 10-mins avg mg/L (ppm):  $\cong$  6.10 mg/L (ppm)

### Peak H<sub>2</sub> Concentration at SATP:

- 5-mins peak mg/L (ppm):  $\cong$  4.10 mg/L (ppm)
- 10-mins peak mg/L (ppm):  $\cong$  6.30 mg/L (ppm)

### Avg H<sub>2</sub> mg Produced in Designated Vol:

- 5-mins:  $\cong$  0.84 mg ( $\equiv$  10.20 mL Dissolved)
- 10-mins:  $\cong$  1.27 mg ( $\equiv$  15.42 mL Dissolved)

- **Claimed H<sub>2</sub> mg/L (ppm) confirmed: Yes**

### H<sub>2</sub>HUBB Hydrogen Concentration Assessment

- According to our testing, the H<sub>2</sub>-Max Hydrogen Water Bottle consistently achieved dissolved molecular hydrogen concentrations ranging from 4.05 to 6.10 mg/L (ppm) during both the 5- and 10-minute generation cycles, with a peak concentration of 6.30 mg/L (ppm) measured using the Unisense H<sub>2</sub> Microsensor. Based on current human clinical literature, these concentrations are sufficient to provide therapeutic benefits. The device exceeds H<sub>2</sub>HUBB's performance standards for both **H<sub>2</sub> Concentration and Daily Dose of H<sub>2</sub>**. For practical use, we recommend the 10-minute cycle as the optimal dose and setting for preparing hydrogen-rich water with this bottle.

### Contamination Test:

- Chlorine (Cl<sub>2</sub>): No detectable levels
- Ozone (O<sub>3</sub>): No detectable levels

## Internal Performance

### Manufacturer's Rated Electrical Values: (as stated on the power supply)

- **Type of device/electrolytic cell**
  - Pure H<sub>2</sub>: PEM/SPE membrane
- **Applied volts:**
  - 3.7 volts
- **Total Amps:**
  - 2200 mAh (2.20 amps)
- **Total watts:**
  - 8.14 Wh (watts)



# Product Assessment

## Functionality:

- Power on/off button
  - Located on the H<sub>2</sub> generator.
  - Press the power button to initiate electrolysis for hydrogen gas production and initiate a 5-minute session, then shuts off.
  - Press the power button twice to initiate a 10-minute session time then shuts off.
- USB-C charging port
  - Located on the backside of the device.
- Anode reservoir off-gas port
  - Pin-hole located on the bottom of the bottle.

## Reliability:

- New: Yes
  - Initial test results and evaluation are currently on the report. (see Overall Opinion)

## Overall Opinion

The H<sub>2</sub>-Max Hydrogen Water Bottle is a well-constructed, high-pressure (high-PSI) hydrogen water generator. In H<sub>2</sub>HUBB's evaluation, a 10-minute operation cycle produced an average dissolved hydrogen concentration of 6.10 mg/L (ppm) in 208 mL (7.03 oz) of water, corresponding to a total hydrogen content of 1.27 mg, or approximately 15.42 mL of H<sub>2</sub> gas at SATP. The device also achieved a peak hydrogen concentration of 6.30 mg/L, demonstrating its ability to exceed the 6.0 mg/L threshold—an emerging benchmark among the highest-performing hydrogen water bottles currently available on the market.

It is important to note that H<sub>2</sub>HUBB documents maximum peak concentrations for reference purposes only; such values should not be interpreted as concentrations that can be consistently achieved. For this reason, our reports emphasize average dissolved hydrogen concentrations derived from multiple replicate tests, as these provide a more reliable indicator of sustained performance and consistency. Dissolved hydrogen levels were measured using a Unisense H<sub>2</sub> Microsensor with UniAmp amplifier, a laboratory-grade electrochemical system custom configured for H<sub>2</sub>HUBB to accurately quantify dissolved hydrogen across a wide measurement range (approximately 0.001 to 20 mg/L). This custom configuration enables precise measurement of both low-level residual hydrogen and high-concentration, pressure-assisted hydrogen water, while minimizing the variability commonly observed with colorimetric (oxidimetry-based) testing methods.

Based on these results, the H<sub>2</sub>-Max bottle is capable of delivering a therapeutically relevant dose of molecular hydrogen when used consistently. Drinking just one full 208 mL bottle produced on the 10-minute cycle provides more than 0.8 mg of H<sub>2</sub>—exceeding H<sub>2</sub>HUBB's minimum daily effective dose standard, as supported by peer-reviewed hydrogen research. Consuming 1–4 bottles per day (approximately 208–832 mL or 7–28 oz) can further increase total daily hydrogen intake and may support a broader range of potential therapeutic applications.

Dissolved hydrogen concentration (mg/L (ppm)) is a critical performance metric, as research suggests that 1-3 mg of H<sub>2</sub> or more per day appears to be therapeutic for humans. Furthermore, the **IHSA** standard for this type of product is a minimum of 0.5 mg/serving or 0.5 mg/L. H<sub>2</sub>HUBB's performance standard for hydrogen water devices is slightly higher than IHSA, as we require the device to provide a concentration of 0.8 mg/L (ppm) and 0.8 mg/day consistently. The H<sub>2</sub>-Max Hydrogen Water Bottle offered by ZYNAFLO surpassed H<sub>2</sub>HUBB standards for both **H<sub>2</sub> Concentration and Daily Dose of H<sub>2</sub>**. Based on current research data, we believe the device's mg/L (ppm) performance provides adequate levels of hydrogen gas to induce therapeutic effects in humans. **According to our test results, the product will be able to easily provide 1-3 mg of H<sub>2</sub> per day.** We are pleased with the device's dissolved hydrogen concentration.


Overall, the H<sub>2</sub>-Max Hydrogen Water Bottle is a well-designed system constructed from safe materials and capable of consistently producing therapeutic concentrations of dissolved hydrogen gas within its 208 mL capacity. The manufacturer's safety claims were supported by our findings, and the device's performance meets and, in several aspects, exceeds H<sub>2</sub>HUBB's objective internal standards. No safety concerns were identified during testing, and the system effectively incorporates safeguards to prevent the formation of harmful byproducts such as chlorine or ozone in the drinking water. Based on our evaluation, the H<sub>2</sub>-Max Hydrogen Water Bottle represents a safe, practical, and reliable option for in-home hydrogen water therapy, offering consumers both usability and clinically relevant hydrogen dosing.

### Figure 1. 10-Minute Dissolved H<sub>2</sub> Time-Trace – H<sub>2</sub>-Max Bottle (Unisense H<sub>2</sub> Microsensor)

This plot displays the real-time amperometric output from the Unisense H<sub>2</sub> Microsensor paired with the UniAmp amplifier during a 10-minute hydrogen generation cycle of the H<sub>2</sub>-Max Hydrogen Water Bottle. The sensor signal, measured in picoamperes and converted to mg/L hydrogen, captures the dynamic dissolved H<sub>2</sub> concentration in the water in real time with a temporal resolution as fine as 0.02 seconds per data point. Data were recorded over the course of the test period, typically 4–5 minutes following bottle opening.

The trace illustrates both the steady-state hydrogen concentration and the natural signal fluctuations that occur during the precipitation phase, as dissolved hydrogen gas begins to equilibrate and outgas from the solution. Due to the high hydrogen concentration and resulting microbubble formation, occasional signal spikes were observed (a known artifact in high-H<sub>2</sub> solutions). To minimize this effect, H<sub>2</sub>HUBB employed a controlled re-entry technique—removing and reimmersing the microsensor to dislodge surface bubbles—and then averaged the top 15 stable readings to determine the final dissolved hydrogen value.

This high-resolution time series demonstrates the H<sub>2</sub>-Max bottle's ability to sustain elevated hydrogen concentrations during and immediately after generation.

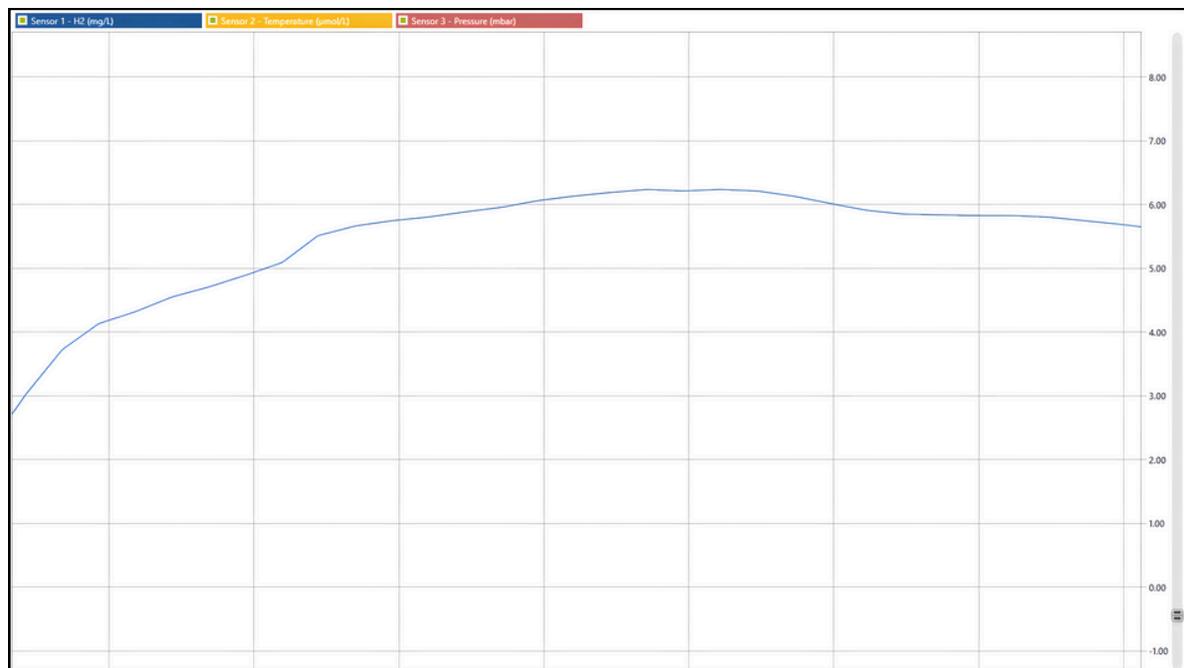

H<sub>2</sub> Hubb LLC disclaimer: All tests conducted and test results produced by H<sub>2</sub> Hubb LLC have been done according to industry-accepted practices and standards. Nevertheless, these results may not necessarily reflect test results performed by manufacturers, suppliers or third-party labs. Our test results are independent of all other parties, and testing by other parties may produce different results. We understand that many variables are involved in testing, some of which are extremely difficult to control. These reports are not meant or intended for any other purpose but to uphold H<sub>2</sub> Hubb LLC's business practices and to validate the reasons for our recommendations.



Approved By: Tywon Hubbard

Handwritten signature of Tywon Hubbard in black ink.

**TYWON HUBBARD**  
CEO, H<sub>2</sub>HUBB LLC



Overland Park, KS



[www.H2HUBB.com](http://www.H2HUBB.com)



[info@H2HUBB.com](mailto:info@H2HUBB.com)